


MINING, CONSTRUCTION AND FORESTRY EQUIPMENT

Clean hydraulic oil

Filters and cleans oil to better quality than when it was new.
Removes particles and water. Extends oil lifetime 10 to 15 times.
For installation on equipment.

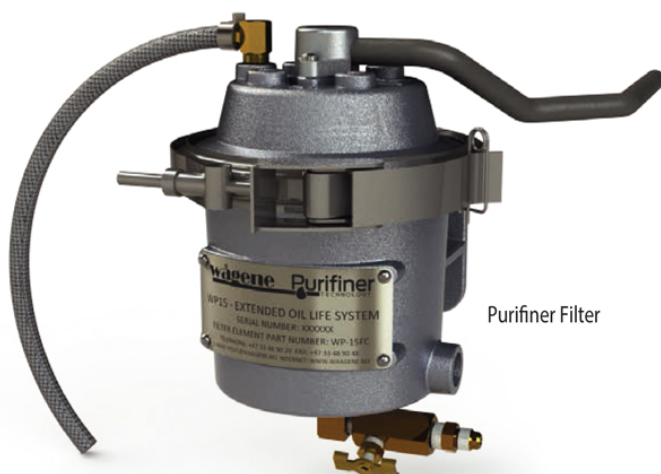

Purifiner Filter

Controller TF5060C



Filters

- WP-50B Up to 1500 litres oil in system
- WP-80B For extreme particle contamination

Purifiner maintain service level of oil

- Filter removes particles down to 1-3 microns
- Evaporates all water, including water emulsified in the oil, down to 100 PPM (0.01%)
- Extends oil's lifetime 10-15 times
- Clean oil reduces breakdowns and maintenance
- Saves the environment



Before

After

Purifiner Controller Specifications

Power Supply	: 24V
Nominal Effect	: 360W / 15A
Flow Rate	: 600 litres/24 hr - 25 litres/hr
Filter Unit	: WP50B or WP80B
Weight	: 11 kg (without filter unit)
Dimensions	: 380 mm (h) x 355 mm (w) x 140 mm (d)
Pipe Connection	: In 10L, out 12S